

Doulton®

Sterasyll® Ceramic Filter Cartridges

Doulton® has been a leading name in drinking water filtration for over 150 years.

Doulton® ceramic elements are now available in a range of standard cartridge formats which bring the quality associated with the Doulton® name to the general filtration market.

Sterasyll®

Features

- Fits Industry standard 10" and 20" filter housings.
- Filtration efficiency of >99.99% at 0.9 micron
- Filtration efficiency of > 99.9% at 0.5 to 0.8 micron
- Highly efficient bacteriological filtration
- Tested with live *Cryptosporidium* to a removal efficiency >99.9999%
- Ideal for R O guard and post filtration
- Complimentary to UV systems



Sterasyll® Ceramic

Doulton Sterasyll is a highly efficient ceramic micro filter which provides genuine sub micron filtration of drinking water.

Sterasyll is manufactured with the highly consistent and controlled pore structure necessary to remove a wide range of water borne contaminants over the life of the cartridge.


In addition to fine particulate matter, bacteria, cysts and turbidity are removed to a high level of efficiency. The incorporation of silver locked within the ceramic structure inhibits the growth of bacteria and gives each cartridge enhanced bacteriostatic and self sterilising properties.

Doulton®

Filtration Data Sheet


Filtration Efficiency

Absolute filtration rating	(defined as > 99.99%)	0.9 micron
Nominal filtration rating	(defined as 99.9%)	0.5 - 0.8 micron
% Bacteria removal	E.coli	> 99.99%
	Vibrio Cholera	> 99.99%
	Shigella	> 99.999%
	Salmonella Typhi	> 99.999%
	Klebsiella Terrigena	> 99.99%
% Cyst removal	Cryptosporidium	> 99.999%
	Giardia	> 99.999%

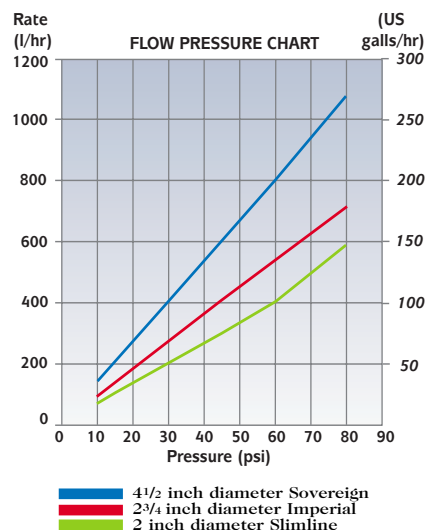


20 Inch Filter Housings

Sterasyt Imperial (2 3/4") and Sovereign (4 1/2") Filter cartridges can be supplied with a second adaptor cartridge to allow fitting in 20 inch filter housings. Due to slight variations in housing design, please state housing manufacturer when ordering.

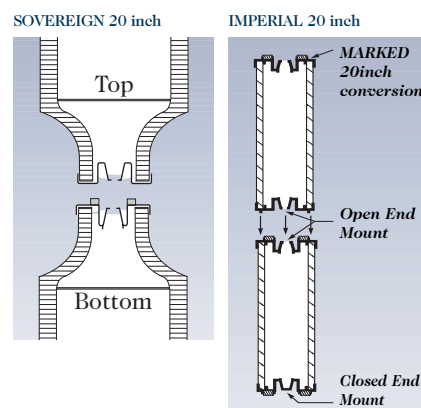

Cartridge Dimensions

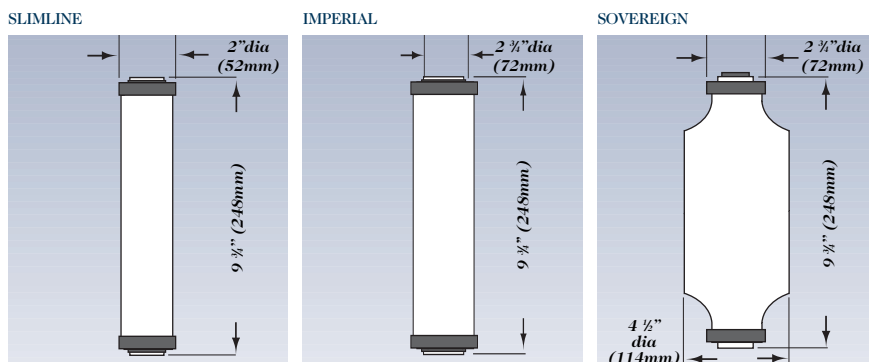

Cartridge Shipping Specification

	Individual cartridge weight	Quantity per outer carton	Outer carton gross weight
Slimline 9 1/4 x 2"	0.2 kg	25	8 kg
Imperial 9 1/4 x 2 3/4"	0.4 kg	9	6 kg
Sovereign 9 1/4 x 4 1/2"	0.8 kg	4	5 kg
Standard carton size 33 x 33 x 34 cm			

Product Specification

Working temperature range	5 - 38°C
Working pH range	5.5 - 9.5
Minimum working pressure	10 psi
Maximum working pressure	125 psi

Distributed by:

