

Series 8800 Pump

Model: 88XX-2X03-A424



Flow Range: Open Flow = 1.90-2.60 LPM

At 80 PSI = 1.00-1.40 LPM

COMPLETING THE PART NUMBER:

88XX-2X03-A424

- Steel Mounting Plate (Other Types Available)
- See Performance Data for Recommended By-pass Pressure and Code
- By-Pass Pressure Relief Control Valve
- Select Pumphead Model From Performance Data Chart
- 3 = Open Ports for 3/8" Compression Fitting
- 4 = Push to Connect Ports for 1/4" Tubing
- 5 = Push-to-Connect Ports for 3/8" Tubing

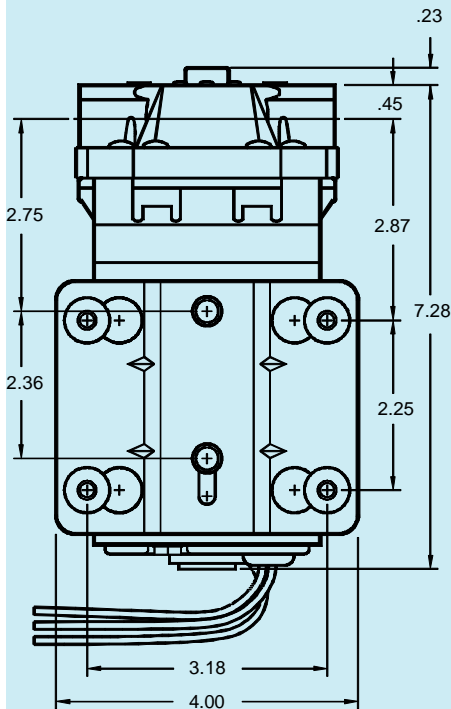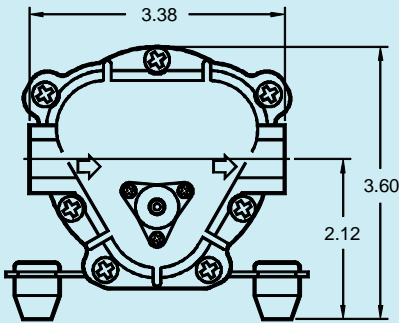

WEIGHT: 6 lbs.

SPECIFICATIONS:

- MOTOR:**
 - TYPE: 24 VAC, Permanent Magnet, Totally Enclosed, Non-Ventilated
 - LEADS: 20 AWG, 6" LONG
 - TEMP. LIMITS: This Motor is Not Equipped with Thermal Protection. For User Safety, Optimal Performance, and Maximum Motor Life, The Motor Surface Temperature Should Not Exceed 150°F (66°C), as Shown on the Heat Rise Graph.
 - DUTY CYCLE: See Heat Rise Graph

- PUMP DESIGN:** 3 Chamber Diaphragm Pump, Self Priming, Capable of Being Run Dry

- TYPICAL APPLICATION:** Pre-Filter Water Treatment (R.O. Boost)

- MATERIALS:**
 - HOUSINGS: Nylon
 - VALVES: EPDM
 - DIAPHRAGM: Santoprene
 - FASTENERS: Stainless Steel

- LIQUID TEMPERATURE:** 170°F (77°C) Max.

- PUMP CERTIFICATIONS:** NSF Standard 58

- PRIMING CAPABILITIES:**

| | 88X0 | 88X1 | 88X2 |
|--------------|------|------|------|
| PRIME (FEET) | 4 | 5 | 6 |

- FITTINGS:**

| TYPE | SHAPE | KIT NO. | CONNECTS TO... |
|------------------|----------|---------|---------------------------------|
| 3/8" COMPRESSION | STRAIGHT | 25-145 | 3/8" TUBING |
| 3/8" COMPRESSION | ELBOW | 25-146 | 3/8" TUBING |
| 3/8" STEM | STRAIGHT | 25-144 | 3/8" JOHN GUEST PUSH-ON FITTING |



Aquatec Water Systems, Inc.
 17422 Pullman
 Irvine, CA 92614
 Sales: 949-225-2200
 Fax: 949-225-2222




Series 8800 Pump

Model: 88XX-2X03-A424

| PERFORMANCE DATA | | | | | | | | |
|--------------------------|----------------|----------------|------------|----------------|------------|----------------|------------------------------|------|
| DISCHARGE PRESSURE (PSI) | PUMPHEAD MODEL | | | | | | RECOMMENDED BY-PASS PRESSURE | |
| | 88X0 | | 88X1 | | 88X2 | | PSI | CODE |
| | FLOW (LPM) | CURRENT (AMPS) | FLOW (LPM) | CURRENT (AMPS) | FLOW (LPM) | CURRENT (AMPS) | | |
| 80 | 1.00 | 1.20 | 1.20 | 1.40 | 1.40 | 1.65 | 110 | J |
| 70 | 1.10 | 1.14 | 1.30 | 1.29 | 1.50 | 1.55 | 100 | I |
| 60 | 1.20 | 1.06 | 1.40 | 1.19 | 1.60 | 1.43 | 90 | H |
| 50 | 1.30 | 0.98 | 1.50 | 1.10 | 1.80 | 1.29 | 80 | G |
| 40 | 1.40 | 0.90 | 1.55 | 0.99 | 1.90 | 1.17 | 70 | F |
| 30 | 1.50 | 0.82 | 1.70 | 0.89 | 2.00 | 1.02 | 60 | E |
| 20 | 1.55 | 0.72 | 1.85 | 0.77 | 2.20 | 0.91 | 50 | D |
| 10 | 1.80 | 0.60 | 2.00 | 0.64 | 2.50 | 0.75 | 40 | B |
| OPEN | 1.90 | 0.53 | 2.10 | 0.58 | 2.60 | 0.70 | 30 | A |

PERFORMANCE MEASURED WITH FLOODED INLET (0 PSI), 70°F (21°C) AMBIENT AND WATER TEMPERATURE, AND VOLTAGE CONTROLLED AT 24 VAC. POSITIVE INLET PRESSURE WILL INCREASE THE DISCHARGE PRESSURE BY A SIMILAR AMOUNT, FOR A GIVEN FLOW. MAXIMUM INLET PRESSURE IS 60 PSI.

SHADED AREA DENOTES CONTINUOUS OPERATION CAPABILITY AT DESIGNATED PRESSURE AND CURRENT.

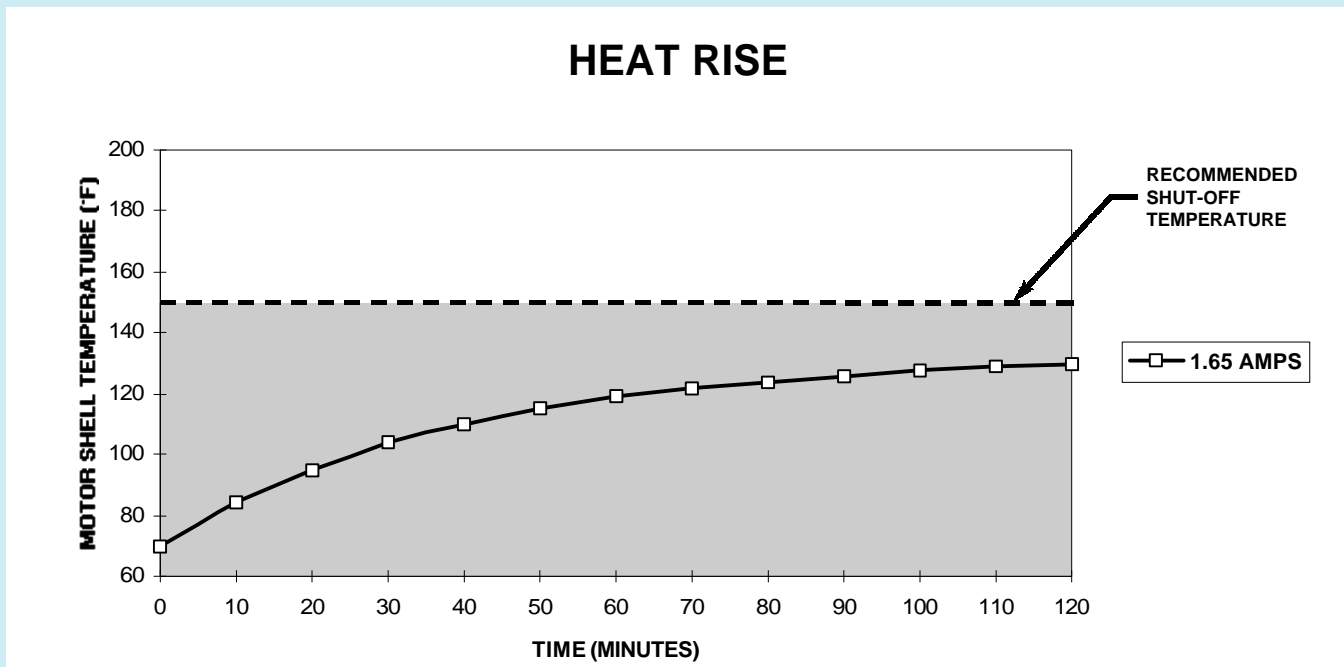

All of the pump models in the Performance Data and Heat Rise charts are in the shaded area, meaning they are capable of sustaining continual running, at any of the above listed pressures, without shutting down to allow the motor to cool. To conserve wearing parts, however, the pump should only operate as needed.

Care should be exercised in selecting the proper transformer for this 24 VAC motor. The largest “wall mount” transformer from Aquatec is only rated to .80 amps. Aquatec’s “table top” transformer is rated to 2.00 amps. By-Pass pressures must also be considered when selecting a suitable transformer, in the event the pump is allowed to reach the preset by-pass pressure for sustained periods.

ALL PERFORMANCE AND HEAT RISE FIGURES ARE APPROXIMATE. ACTUAL VALUES WILL VARY WITH AMBIENT CONDITIONS.